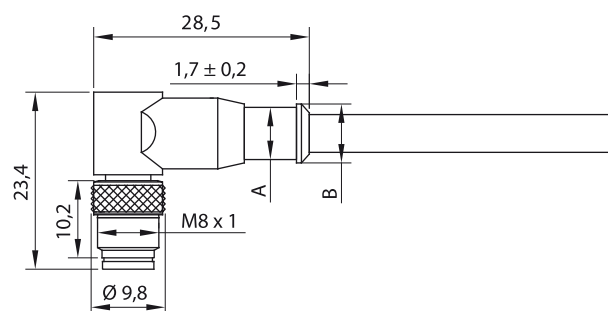
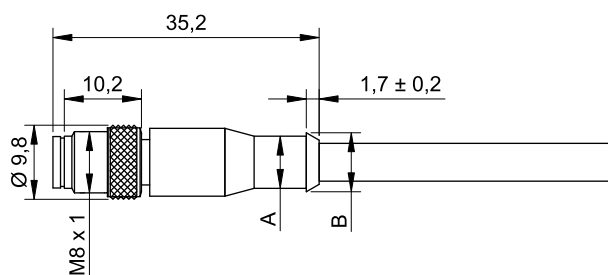




A=Ø7 - B=Ø8 with Ø cable ≤5
A=Ø8 - B=Ø9 with Ø cable >5

disegni scala 1:1

GENERAL FEATURES




contact material:
Au over Ni plated CuZn

cupling nut material:
CuZn, Ni plated

protection class:
IP67

housing material:
TPU (Polyurethane)

temperature range:
-25°C + 80°C

Face view	Coding/poles	Locking system	Connections	Voltage (V)	Max current (A)	Features	Housing color
	A/3	Ring nut without anti-vibration system		60	3	Without electronics	Black
	A/4	Ring nut without anti-vibration system		60	3	Without electronics	Black

CODING CODE

N Housing color	08S Family	MD Connector type	3 Pin no.	F Cable type	3 Section	10 Length	S Customized
N Black G Grey T Colorless Y Yellow ...	08S Shielded M8 ...	MD Straight male MA Angled male	3 3 pin 4 4 pin ...	A Grey PVC/PVC AU Grey PVC/PVC UL CSA B Shielded grey PVC/PVC BU Shielded grey PVC/PVC UL CSA E Black PVC/PVC EU Black PVC/PVC UL CSA F Shielded black PVC/PVC FU Shielded black PVC/PVC UL CSA I Gray PUR/PVC IU Gray PUR/PVC UL CSA M Black PUR/PVC MU Black PUR/PVC UL CSA N Shielded black PUR/PVC NU Shielded black PUR/PVC UL CSA ...	1 Sec. 0,14 mmq 2 Sec. 0,25 mmq 3 Sec. 0,34 mmq 4 Sec. 0,50 mmq ...	0A 0,10 m 0B 0,20 m 1Z 1 m 10 10 m 10C 10,3 m 100 100 m ...	S Standard ...